




# Double Swing Height Restrictor with Swing Gate

## 6m, 8m, 10m, 12m, and 14m

### Galvanised and Colour

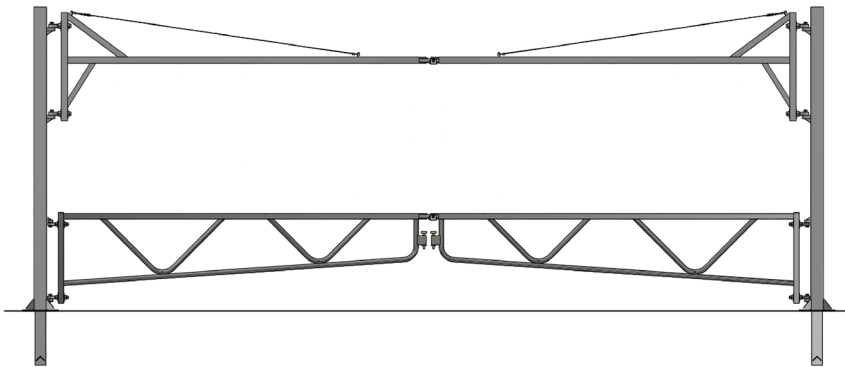

The AUTOPA Double Swing Height Restrictor with Double Swing Gates has a standard clearance of 2.05m, limiting access to high sided vehicles. Ideal for use on commercial sites such as retail parks, it spans two carriageways, preventing vehicles from circumnavigating access control measures in place. The booms of the Swing Gates can be opened to allow low sided vehicles to access the site whilst preventing high sided vehicles from access, the Height Restrictors can be opened when full access is required.

Manufactured from galvanised mild steel, the system is coated red as standard (other colours are available upon request; please state BS/RAL numbers at time of order). Both the boom and gate can both be locked in the open and closed positions using additional catch posts and padlocks (available separately).

**Knock bars to suit barrier can be supplied at an extra cost.**

The standard clearance is 2.05m including knock bar, 2.2m excluding knock bar.



<u>Part Number</u>	<u>Description</u>
138 106 920	6m Galvanised & Colour - Bolt Down
138 106 920R	6m Galvanised & Colour - Concrete In
138 106 921	8m Galvanised & Colour - Bolt Down
138 106 921R	8m Galvanised & Colour - Concrete In
138 106 922	10m Galvanised & Colour - Bolt Down
138 106 922R	10m Galvanised & Colour - Concrete In
138 106 923	12m Galvanised & Colour - Bolt Down
138 106 923R	12m Galvanised & Colour - Concrete In
138 106 924	14m Galvanised & Colour - Bolt Down
138 106 924R	14m Galvanised & Colour - Concrete In

#### Product details

- Standard Clearance: 2.2m (without a knock bar)
- Standard Clearance: 2.05m (with a knock bar) - **Optional Extra**
- Main Body: 120mm x 120mm square tube
- Main Gate Arm: 60mm x 60mm square tube
- 3mm wall thickness
- Concrete in 600mm (below ground)

#### Installation & use

Bolt down Height Restrictors require bolting down to a suitable concrete surface (no less than 600mm<sup>3</sup>) by means of four M16 bolts per leg. Concrete in Height Restrictors & Catch Posts require an excavated hole (no less than 600mm<sup>3</sup>) for installation. It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction. This product is guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

