




# Swing Height Restrictor with Swing Gate 3m, 4m, 5m, 6m and 7m Galvanised and Colour

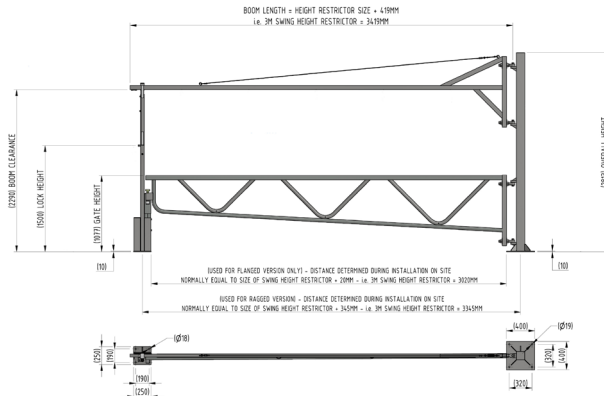

The AUTOPA Swing Height Restrictor with Swing Gate has a standard clearance of 2.05m, limiting access to high sided vehicles and is perfect for controlling access at retail park entrances. Whilst providing an effective barrier to vehicles of all sizes it can be opened as required to allow access to any vehicle.

Manufactured from galvanised mild steel, the system is coated red as standard (other colours are available upon request; please state BS/RAL numbers at time of order). The boom and the gate can both be locked in the open and closed positions with an additional catch post and padlocks (available separately). The AUTOPA Swing Height Restrictor is available ragged or flanged, and as an optional extra can also be fitted with a knocking bar and/or a maximum height warning sign.

**Knock bars to suit the barrier can be supplied at an extra cost.**

The standard clearance is 2.05m with a knock bar, 2.2m without a knock bar.



Part Number	Description
138 106 690	3m Galvanised & Colour - Bolt Down
138 106 691	3m Galvanised & Colour - Concrete In
138 106 692	4m Galvanised & Colour - Bolt Down
138 106 693	4m Galvanised & Colour - Concrete In
138 106 694	5m Galvanised & Colour - Bolt Down
138 106 695	5m Galvanised & Colour - Concrete In
138 106 696	6m Galvanised & Colour - Bolt Down
138 106 697	6m Galvanised & Colour - Concrete In
138 106 698	7m Galvanised & Colour - Bolt Down
138 106 699	7m Galvanised & Colour - Concrete In

## Product details

- Standard Clearance: 2.2m (without a knock bar)
- Standard Clearance: 2.05m (with a knock bar) - **Optional Extra**
- Main Body: 120mm x 120mm square tube
- Main Gate Arm: 60mm x 60mm square tube
- 3mm wall thickness
- Concrete in 600mm (below ground)

## Installation & use

Bolt down Height Restrictors require bolting down to a suitable concrete surface (no less than 600mm<sup>3</sup>) by means of four M16 bolts per leg. Concrete in Height Restrictors require an excavated hole (no less than 600mm<sup>3</sup>) for installation. It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction. This product is guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

