


## Hooped Perimeter Barrier with Horizontal Rail 60mm Diameter Galvanised, Bolt Down



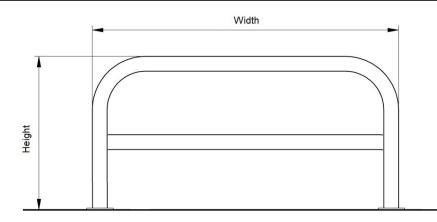

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 176 008H	500 x 750 with Horizontal Rail, Galvanised - Bolt Down	11kg
138 176 014H	500 x 1000 with Horizontal Rail, Galvanised - Bolt Down	13kg
138 176 020H	500 x 1500 with Horizontal Rail, Galvanised - Bolt Down	17kg
138 176 006H	500 x 2000 with Horizontal Rail, Galvanised - Bolt Down	22kg
138 176 004H	750 x 1000 with Horizontal Rail, Galvanised - Bolt Down	15kg
138 176 010H	750 x 1500 with Horizontal Rail, Galvanised - Bolt Down	22kg
138 176 073H	750 x 2000 with Horizontal Rail, Galvanised - Bolt Down	24kg
138 176 024H	1000 x 1000 with Horizontal Rail, Galvanised - Bolt Down	18kg
138 176 030H	1000 x 1500 with Horizontal Rail, Galvanised - Bolt Down	22kg
138 176 036H	1000 x 2000 with Horizontal Rail, Galvanised - Bolt Down	26kg

## **Product details**

- 3mm wall thickness
- 6 bolts required per barrier
- Round flange plate 133mm x 5mm

- Colour coated options available extra
- Complete with hoizontal rail

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

