




Hooped Perimeter Barrier with Horizontal Rail

76mm Diameter Stainless Steel, Bolt Down

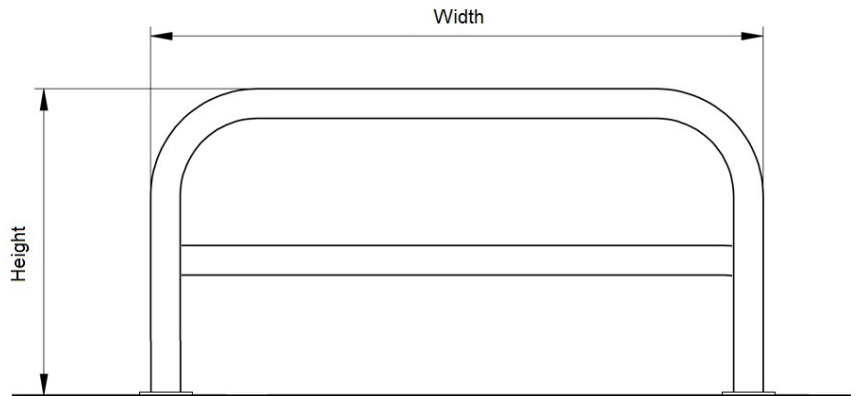

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 205 391H	500 x 750 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	10kg
138 205 389H	500 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	11kg
138 205 385H	500 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	15kg
138 205 381H	500 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	19kg
138 205 374H	750 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	13kg
138 205 370H	750 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	17kg
138 205 366H	750 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	21kg
138 205 359H	1000 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	15kg
138 205 355H	1000 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	19kg
138 205 351H	1000 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	23kg

Product details

- 2mm wall thickness
- 6 bolts required per barrier
- Round flange plate – 150mm x 5mm
- Brushed finish
- Complete with horizontal rail

Installation & use

Bolt down to a suitable concrete surface.
 Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
 Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
 Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
 +44 (0)1788 550556

AUTOPA Limited
 Cottage Leap, Rugby, Warwickshire CV21 3XP

