




Hooped Perimeter Barrier with Horizontal Rail

90mm Diameter Stainless Steel, Bolt Down

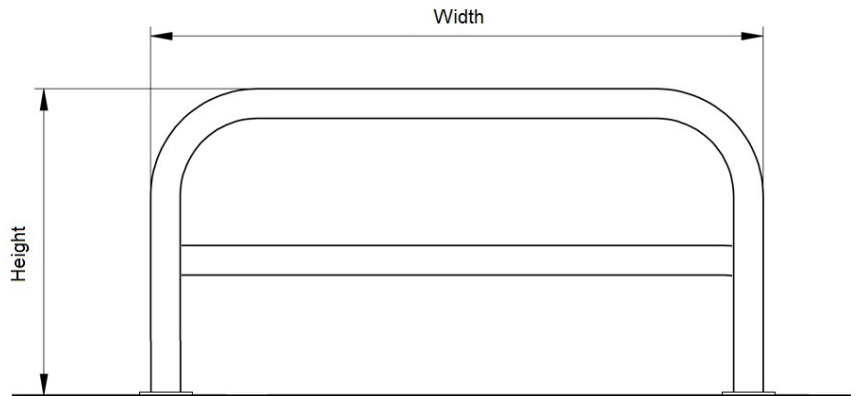

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra.



<u>Part Number</u>	<u>Description, Height above ground x overall width</u>	<u>Weight (kg)</u>
138 205 491H	500 x 750 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	11kg
138 205 489H	500 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	13g
138 205 485H	500 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	17kg
138 205 481H	500 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	22kg
138 205 474H	750 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	15kg
138 205 470H	750 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	20kg
138 205 466H	750 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	24kg
138 205 459H	1000 x 1000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	18kg
138 205 455H	1000 x 1500 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	22kg
138 205 451H	1000 x 2000 with Horizontal Rail, Stainless Steel Grade 304 - Bolt Down	26kg

Product details

- 2mm wall thickness
- 6 bolts require per barrier
- Round flange plate – 150mm x 5mm
- Brushed finish
- Complete with horizontal rail

Installation & use

Bolt down to a suitable concrete surface.
 Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
 Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
 Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
 +44 (0)1788 550556

AUTOPA Limited
 Cottage Leap, Rugby, Warwickshire CV21 3XP

