




Hooped Perimeter Barrier 101mm Diameter Galvanised, Concrete In

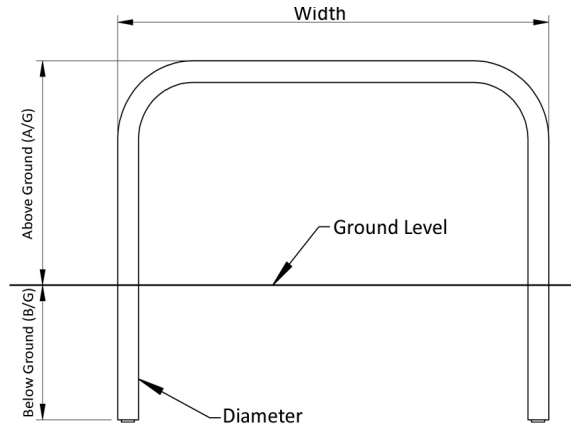

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 179 051	500 x 1000 Galvanised - Concrete In	19kg
138 179 056	500 x 1500 Galvanised - Concrete In	22kg
138 179 062	500 x 2000 Galvanised - Concrete In	26kg
138 179 066	750 x 1000 Galvanised - Concrete In	22kg
138 179 072	750 x 1500 Galvanised - Concrete In	26kg
138 179 078	750 x 2000 Galvanised - Concrete In	30kg
138 179 081	1000 x 1000 Galvanised - Concrete In	26kg
138 179 087	1000 x 1500 Galvanised - Concrete In	30kg
138 179 093	1000 x 2000 Galvanised - Concrete In	33kg

Product details

- 101mm diameter
- 3mm wall thickness
- After galvanising the elbow and tube may differ in appearance
- Concrete in - 300mm (below ground)
- 90° welded elbows

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

