




Hooped Perimeter Barrier 114mm Diameter Galvanised, Concrete In

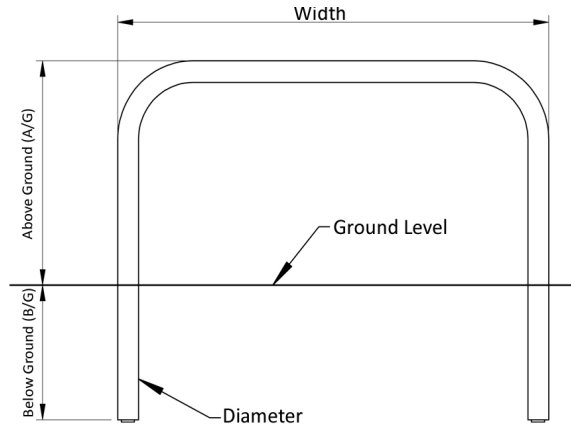

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard, galvanised and colour coated available extra.



Part Number	Description, Height above ground x overall width	Weight (kg)
138 179 151	500 x 1000 Galvanised - Concrete In	21kg
138 179 156	500 x 1500 Galvanised - Concrete In	26kg
138 179 162	500 x 2000 Galvanised - Concrete In	30kg
138 179 166	750 x 1000 Galvanised - Concrete In	26kg
138 179 172	750 x 1500 Galvanised - Concrete In	30kg
138 179 178	750 x 2000 Galvanised - Concrete In	34kg
138 179 181	1000 x 1000 Galvanised - Concrete In	30kg
138 179 187	1000 x 1500 Galvanised - Concrete In	34kg
138 179 193	1000 x 2000 Galvanised - Concrete In	38kg

Product details

- 3mm wall thickness
- Concrete in 300mm (below ground)
- Colour coated options available extra
- After galvanising the elbow and tube may differ in appearance
- 90° welded elbows

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

