




# Wheel Guide 139 & 168 1500mm or 2000mm Galvanised or Galvanised & Colour

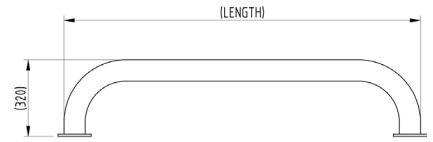

The AUTOPA Wheel Guide is ideal for providing guidance for reversing vehicles in loading bays. The Wheel Guide is available in 76mm, 90mm, 139mm and 168mm outside diameter mild steel galvanised tube which can be coated yellow to increase visibility. The Wheel Guide is available in two lengths, 1500mm or 2000mm.

All products in the range are galvanised mild steel, ensuring their longevity and are designed to take the knocks and bumps that occur in the warehouse and factory environment. The Wheel Guide is also suitable for us as a low level protection rail.

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 177 940	139mm x 1500mm Galvanised	34kg
138 177 941	139mm x 1500mm Galvanised & Yellow	34kg
138 177 950	168mm x 1500mm Galvanised	40kg
138 177 951	168mm x 1500mm Galvanised & Yellow	40kg
138 177 942	139mm x 2000mm Galvanised	42kg
138 177 943	139mm x 2000mm Galvanised & Yellow	42kg
138 177 952	168mm x 2000mm Galvanised	50kg
138 177 953	168mm x 2000mm Galvanised & Yellow	50kg

## Product details

- Available bolt down only
- Square flange plate – 250mm sq x 10mm
- 8 x 16mm bolts required per wheel guide
- 320mm height
- 5mm wall thickness

## Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

