


## Denham Shelter - Galvanised Galvanised Steel Frame Open Sided



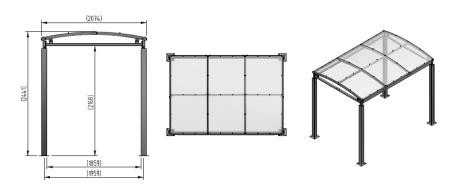

The Denham shelter is a free-standing, open sided shelter designed for on site assembly, constructed from galvanised mild steel. Complete with galvanised sheet curved roof.

Suitable as a cycle shelter or walkway. Width of 2m, with lengths from 1m-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.



B 4 N 1		W 1 1 4 4 3
Part Number	<u>Description</u>	<u>Weight (kg)</u>
138 200 590	Denham Shelter 1m	158kg
138 200 591	Denham Shelter 2m	200kg
138 200 592	Denham Shelter 3m	242kg
138 200 593	Denham Shelter 4m	283kg
138 200 594	Denham Shelter 5m	325kg
138 200 595	Denham Shelter 1m extension bay	
138 200 596	Denham Shelter 2m extension bay	
138 200 597	Denham Shelter 3m extension bay	
138 200 598	Denham Shelter 4m extension bay	
138 200 599	Denham Shelter 5m extension bay	

## **Product details**

- Height 2168mm clearance, 2441mm overall
- Width 2074mm overall
- Length 1m, 2m, 3m, 4m, 5m and extensions

- Square flange plate 200mm x 200mm x 8mm
- · Each flange plate requires 4 bolts
- 1mm galvanised steel panels

## Installation & use

This product is guaranteed for 12 months (if installed and used correctly)

Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts

The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes

On-site assembly requires construction skill



www.autopa.co.uk +44 (0)1788 550556





## Denham Shelter - Galvanised Galvanised Steel Frame Open Sided















www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

