


Denham Shelter Galvanised Steel Frame Open Sided



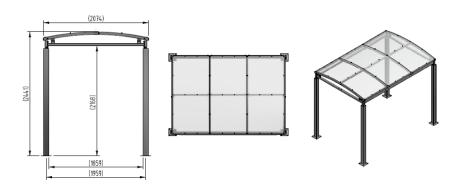

The Denham shelter is a free-standing, open sided shelter designed for on site assembly, constructed from galvanised mild steel. Complete with a 4mm UV stabilised PETG clear sheet curved roof.

Suitable as a cycle shelter or walkway. Width of 2m, with lengths from 1m-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.



Part Number	<u>Description</u>	Weight (kg)
138 200 580	Denham Shelter 1m	155kg
138 200 581	Denham Shelter 2m	193kg
138 200 582	Denham Shelter 3m	231kg
138 200 583	Denham Shelter 4m	269kg
138 200 584	Denham Shelter 5m	307kg
138 200 585	Denham Shelter 1m extension bay	
138 200 586	Denham Shelter 2m extension bay	
138 200 587	Denham Shelter 3m extension bay	
138 200 588	Denham Shelter 4m extension bay	
138 200 589	Denham Shelter 5m extension bay	

Product details

- Height 2168mm clearance, 2441mm overall
- Width 2074mm overall
- Length 1m, 2m, 3m, 4m, 5m and extensions

- Square flange plate 200mm x 200mm x 8mm
- · Each flange plate requires 4 bolts
- 4mm UV stabilised PETG clear sheet panels

Installation & use

This product is guaranteed for 12 months (if installed and used correctly)

Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts

The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes

On-site assembly requires construction skill



www.autopa.co.uk +44 (0)1788 550556





Denham Shelter Galvanised Steel Frame Open Sided











2 x 5 138 200 584



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP

