




Binley Shelter

Galvanised Steel Frame

Open Sided

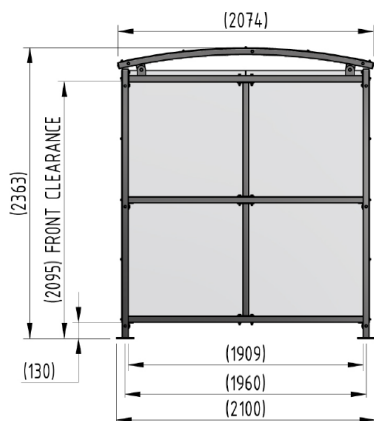

The Binley shelter is a free-standing, open fronted shelter designed for on site assembly, constructed from galvanised mild steel. Complete with a 4mm UV stabilised PETG clear sheet roof, and side panels. Side-to side curved roof.

Suitable as a waiting or trolley shelter. Width of 2m, with lengths from 1m-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.



Part Number	Description	Weight (kg)
138 000 522	Binley Shelter 1m	189kg
138 000 524	Binley Shelter 2m	281kg
138 000 526	Binley Shelter 3m	374kg
138 000 528	Binley Shelter 4m	466kg
138 000 530	Binley Shelter 5m	562kg
138 000 521	Binley Shelter 1m extension bay	
138 000 523	Binley Shelter 2m extension bay	
138 000 525	Binley Shelter 3m extension bay	
138 000 527	Binley Shelter 4m extension bay	
138 000 529	Binley Shelter 5m extension bay	

Product details

- Height – 2095mm clearance, 2363mm overall
- Width – 2074mm overall
- Length – 1m, 2m, 3m, 4m, 5m and extensions
- Square flange plate - 140mm x 140mm x 10mm
- Each flange plate requires 4 bolts
- 4mm UV stabilised PETG clear sheet panels

Installation & use

This product is guaranteed for 12 months (if installed and used correctly)
Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts
The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes
On-site assembly requires construction skill



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP





Binley Shelter Galvanised Steel Frame Open Sided



2 x 1
138 000 522



2 x 2
138 000 524



2 x 3
138 000 526



2 x 4
138 000 528



2 x 5
138 000 530



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

