


Canterbury Shelter Galvanised Steel Frame Open Sided



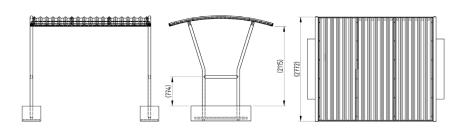

The Canterbury shelter is a free-standing, open sided shelter designed for on site assembly, constructed from galvanised mild steel. Complete with twin wall polycarbonate sheet curved roof.

Suitable as a cycle shelter. Width of 3m, with lengths from 2m-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.



Part Number	<u>Description</u>	Weight (kg)
138 200 606	Canterbury Shelter 2m	188kg
138 200 620	Canterbury Shelter 3m	220kg
138 200 622	Canterbury Shelter 4m	251kg
138 200 611	Canterbury Shelter 5m	283kg
138 200 619	Canterbury Shelter 2m extension bay	
138 200 621	Canterbury Shelter 3m extension bay	
138 200 623	Canterbury Shelter 4m extension bay	
138 200 612	Canterbury Shelter 5m extension bay	

Product details

- Height 2054mm front, 2378mm rear
- Width 3147mm overall
- Length 2m, 3m, 4m, 5m and extensions

- Flange plate 1224mm x 300mm x 8mm
- · Each flange plate requires 8 bolts
- 10mm twin wall polycarbonate clear sheet panels

Installation & use

This product is guaranteed for 12 months (if installed and used correctly)

Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts

The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes

On-site assembly requires construction skill



www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP





Canterbury Shelter Galvanised Steel Frame Open Sided



138 200 606



3 x 3 138 200 620



3 x 4 138 200 622



3 x 5 138 200 611



