




Fixed Bollard 750mm Above Ground 60mm - 193mm Diameter Galvanised - Bolt Down

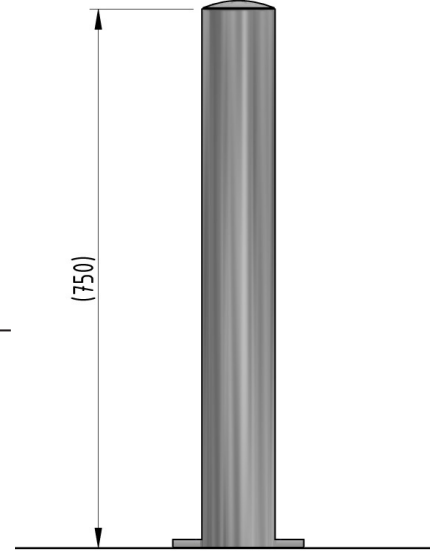

The galvanised mild steel range of 750mm tall fixed bollards are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round bollards are available in 60mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Bollard is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available extra.

<u>Part Number</u>	<u>Diameter</u>	<u>Weight (kg)</u>
138 121 102	60mm Galvanised	4kg
138 121 254	76mm Galvanised	5kg
138 121 278	90mm Galvanised	6kg
138 121 326	101mm Galvanised	7kg
138 121 424	114mm Galvanised	8kg
138 121 554	127mm Galvanised	9kg
138 121 626	139mm Galvanised	17kg
138 121 654	152mm Galvanised	11kg
138 121 724	168mm Galvanised	18kg
138 121 784	193mm Galvanised	20kg

Product details

- 3mm wall thickness - 60mm-127mm and 152mm
- 5mm wall thickness - 139mm, 168mm, and 193mm
- 3 hole round plate - 133mm x 5mm - 60mm & 76mm diameters
- 3 hole round plate - 180mm x 5mm - 90mm - 114m diameters
- 4 hole square plate - 250mm x 10mm - 127mm - 193mm diameters

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

