




Plain Round Bollard 750mm Above Ground 168mm - 323mm Diameter Galvanised - Concrete In

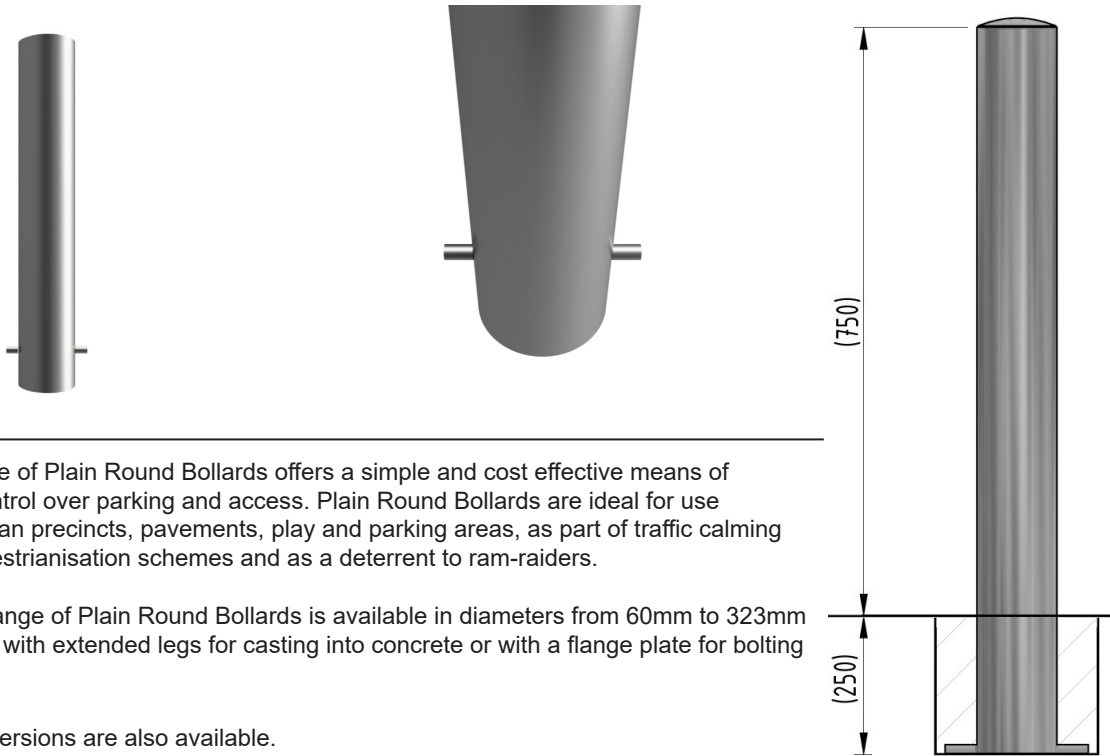

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Round Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 60mm to 323mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated versions are also available.

| <u>Part Number</u> | <u>Diameter</u> | <u>Weight (kg)</u> |
|--------------------|------------------|--------------------|
| 138 121 723 | 168mm Galvanised | 20kg |
| 138 121 783 | 193mm Galvanised | 23kg |
| 138 121 942 | 219mm Galvanised | 26kg |
| 138 122 101 | 273mm Galvanised | 41kg |
| 138 122 201 | 323mm Galvanised | 49kg |

Product details

- 5mm wall thickness - 168mm - 219mm
- 6.3mm wall thickness - 273mm - 323mm
- Concrete in 250mm (below ground)
- Complete with a welded steel cap

Installation & use

Bolt down to a suitable concrete surface.
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.
Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

