
## **Bowerham Cycle Shelter**





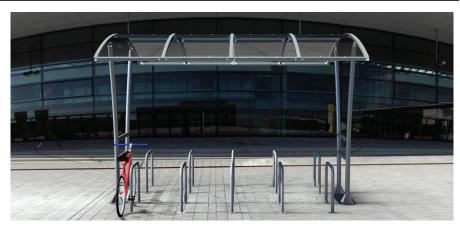

The Bowerham Cycle Shelter has a simple, universal design similar to our highly popular Cambourne Cycle Shelter. Designed to hold either two rows of bicycles, it is an ideal BREEAM compliant solution for all sites where high density cycle parking is required.

Manufactured from galvanised mild steel with a UV stabilised PETG roof, the Bowerham Cycle Shelter can be colour coated to any BS or RAL colour to suit the wider aesthetics of a site (codes must be specified at time of order). The Bowerham is available ragged or flanged and can be extended as necessary with the addition of one or more extension bays.



Part Number	<u>Description</u>	Weight (kg)
138 204 231	3m Main Bay, Bolt down	356.0kg
138 204 234	4m Main Bay, Bolt down	423.0kg
138 204 236	5m Main Bay, Bolt down	488.0kg
138 204 232	3m Extension Bay, Bolt down	266.0kg
138 204 235	4m Extension Bay, Bolt down	332.0kg
138 204 237	5m Extension Bay, Bolt down	397.0kg
138 101 010	Pack of 16 M16 Expanding bolts (for fixing 3-4m)	
138 101 012	Pack of 24 M16 Expanding bolts (for fixing 6-8m)	
138 101 016	Pack of 32 M16 Expanding bolts (for fixing 9-10m)	

## **Product details**

- 4mm clear PET sheet
- 2964mm x 4117mm (height x depth)

- Colour Coated options available
- Extendable to any length using extension bays

## Installation & use

Each shelter leg requires bolting down to a suitable concrete surface (no less than 1,600mm x 500mm x 400mm) by means of eight M16 bolts. The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes. On-site assembly requires construction skill.

This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556







