

Fixed Post 750mm Above Ground 60mm - 101mm Diameter Galvanised






The galvanised mild steel range of 750mm tall fixed posts are suitable for a range of applications and are ideal as a complement to the Autopa ranges of Parking Posts, RemovaPosts and RetractaPosts.

The round posts are available in 60mm - 193mm diameter tube and come finished with a welded steel cap.

The Fixed Post is available with extended legs for casting into concrete or a flange plate for bolting down.

Removable and colour coated versions also available.

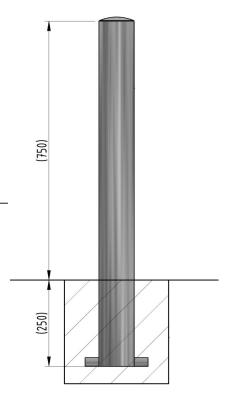

| Part Number | Diameter and Fixing Detail |
|-------------|-------------------------------------------|
| 138 121 101 | 60mm (Concrete In) |
| 138 121 102 | 60mm (Bolt Down) |
| 138 121 253 | 76mm (Concrete In) |
| 138 121 254 | 76mm (Bolt Down) |
| 138 121 283 | 90mm (Concrete In) |
| 138 121 278 | 90mm (Bolt Down) |
| 138 121 323 | 101mm (Concrete In) |
| 138 121 326 | 101mm (Bolt Down) |
| | |
| 138 100 994 | M12 Expanding Bolt (3 required per post) |
| 138 100 993 | M12 Foundation Bolt (3 required per post) |
| 138 100 995 | M12 Rawl Bolt (3 required per post) |
| | |

Product details

- 750mm tall
- Cast in posts 250mm below ground
- Reflective bands available

- · Colour coated options available extra
- Larger diameter versions available

Installation & use

Bolt down Fixed Posts require bolting down to a suitable concrete surface (no less then 400mm3).

48mm- 114mm three M12 bolts, 139mm - 193mm four M16 bolts.

Concrete In fixed posts are supplied with welded fixing spikes to ensure firm ground anchorage.

Concrete In Fixed posts require an excavated hole (no less than 300mm deep) for installation.

This product is guaranteed for 12 months (if installed and used correctly).

www.autopa.co.uk +44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP



