

## Mitre Top Bollard 1000mm Above Ground 129mm - 204mm Diameter Stainless Steel






AUTOPA's range of Mitre Top Round Stainless Steel Bollards are a simple and elegant way of controlling vehicle parking and access.

Mitre Top Stainless Steel Bollards are the preferred choice for prestigious sites as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Mitre Top Round Stainless Steel Bollards are available in diameters from 60mm to 204mm in Grade 304 or Grade 316 and available with extended legs for casting into concrete or with a flange plate for bolting down.

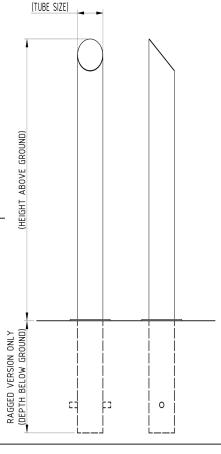

Part Number	<u>Description</u>	Wall Thickness	Weight (kg)
138 126 129	129mm (Concrete In)	2mm	9.4kg
138 126 130	129mm (Bolt Down)	2mm	7.3kg
138 126 139	139mm (Concrete In)	2mm	10.0kg
138 126 140	139mm (Bolt Down)	2mm	8.1kg
138 126 154	154mm (Concrete In)	2mm	11.3kg
138 126 155	154mm (Bolt Down)	2mm	9.4kg
138 126 168	168mm (Concrete In)	2mm	12.5kg
138 126 169	168mm (Bolt Down)	2mm	10.2kg

## **Product details**

- 1000mm tall
- Concrete In bollards 400mm below ground
- Re-inforcing cores available

- Grade 316 versions available
- · Reflective bands available
- · Supplied with welded steel cap

## Installation & use

Concrete In bollards require an excavated hole (no less than 400mm3) for installation. Bolt down Plain Bollards require bolting down to a suitable concrete surface (no less then 400mm3).

48mm - 114mm three M12 bolts, 139mm - 193mm three M16 bolts.

AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them.

This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

