




Plain Round Bollard 1000mm Above Ground 129mm - 204mm Diameter Stainless Steel

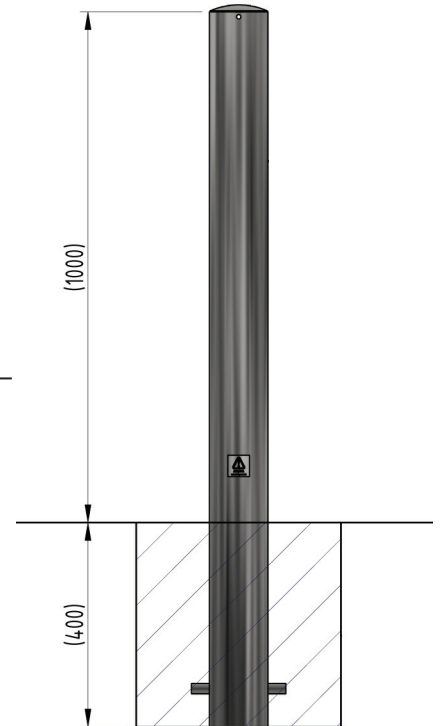

AUTOPA's range of Plain Round Stainless Steel Bollards is a simple and elegant way of controlling vehicle parking and access. Plain Round Stainless Steel Bollards are ideal for use around pedestrian precincts, shops, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Stainless Steel Bollards are available in diameters from 60mm to 204mm in Grade 304 or Grade 316 and available with extended legs for casting into concrete or with a flange plate for bolting down.

Removable versions are also available.

Part Number	Description	Wall Thickness	Weight (kg)
138 125 129	129mm (Concrete In)	2mm	9.4kg
138 125 130	129mm (Bolt Down)	2mm	7.3kg
138 125 139	139mm (Concrete In)	2mm	10.0kg
138 125 137	139mm (Bolt Down)	2mm	8.1kg
138 125 154	154mm (Concrete In)	2mm	11.3kg
138 125 153	154mm (Bolt Down)	2mm	9.4kg
138 125 168	168mm (Concrete In)	2mm	12.5kg
138 125 173	168mm (Bolt Down)	2mm	10.2kg
138 125 204	204mm (Concrete In)	2mm	15.0kg
138 125 206	204mm (Bolt Down)	2mm	12.3kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Re-inforcing cores available
- Grade 316 versions available
- Reflective bands available
- Supplied with welded steel cap

Installation & use

Concrete In Plain Bollards require an excavated hole (no less than 400mm³) for installation. Bolt down Plain Bollards require bolting down to a suitable concrete surface (no less than 400mm³). 48mm - 114mm three M12 bolts, 139mm - 193mm three M16 bolts.

AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

