




# Hooped Perimeter Barrier 76mm Diameter Galvanised, Concrete In

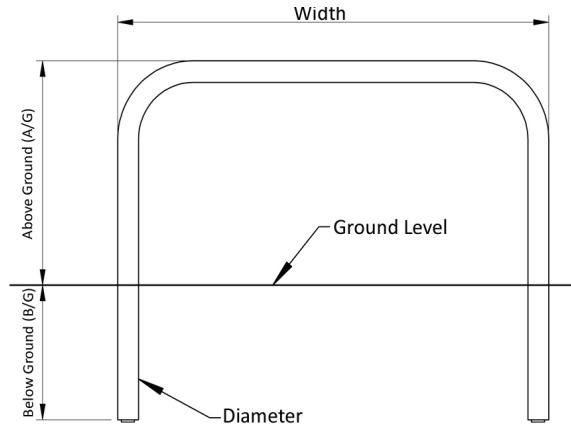

Perimeter Barriers are designed to help secure site perimeters and provide a permanent obstacle to vehicle access, to mark boundaries, define trolley parks and protect vulnerable door entrances and exits.

Suited to sites where aesthetics and security are equally important, perimeter barriers are commonly found outside car showrooms acting as protection for the cars on the forecourt without impeding a customer's view of the vehicles.

Available in a variety of heights and widths, available as concrete in, bolt down or removable for occasional access.

Available as galvanised as standard. Stainless steel, galvanised and colour coated available extra. Tube diameters 48mm, 60mm, 76mm & 90mm available.



<u>Part Number</u>	<u>Description, Height above ground x overall width</u>
138 177 666	500 x 750 (Concrete in)
138 177 680	500 x 1000 (Concrete in)
138 177 684	500 x 1500 (Concrete in)
138 177 688	500 x 2000 (Concrete in)
138 177 664	750 x 1000 (Concrete in)
138 177 670	750 x 1500 (Concrete in)
138 177 676	750 x 2000 (Concrete in)
138 177 660	1000 x 1000 (Concrete in)
138 177 656	1000 x 1500 (Concrete in)
138 177 650	1000 x 2000 (Concrete in)

## Product details

- Concrete in, 300mm below ground
- 76mm Diameter Galvanised Steel Tube

## Installation & use

Each leg of the barrier requires a hole of approximately 400mm<sup>3</sup> and then concreted in for installation.  
This product is guaranteed for 12 months (*if installed and used correctly*)



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

