




Plain Round Bollard 1500mm Above Ground 114mm - 219mm Diameter Galvanised & Yellow - Bolt Down

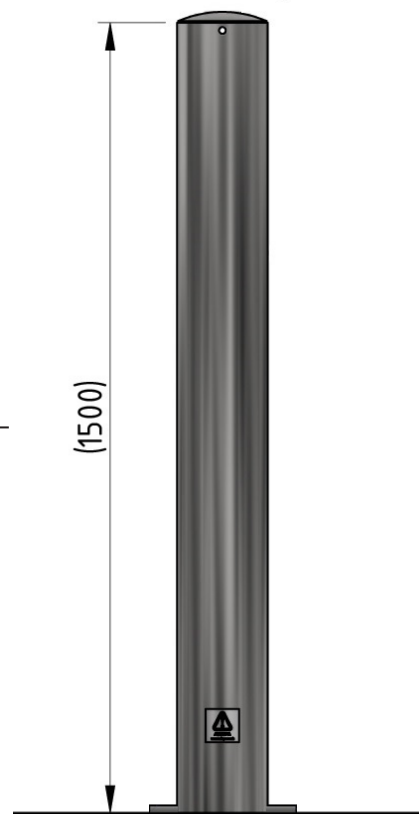

AUTOPA's range of Plain Round Bollards offers a simple and cost effective means of establishing control over parking and access. Yellow bollards are suitable for use where high visibility is paramount and can be used around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Round Bollards is available in diameters from 114mm to 219mm and is available with extended legs for casting into concrete or with a flange plate for bolting down.

Additional colour coated options and removable versions are also available.

Part Number	Diameter	Weight (kg)
138 121 443Y	114mm Galvanised & Yellow	16kg
138 121 625Y	139mm Galvanised & Yellow	33kg
138 121 655Y	152mm Galvanised & Yellow	22kg
138 121 711Y	168mm Galvanised & Yellow	37kg
138 121 814Y	193mm Galvanised & Yellow	44kg
138 121 917Y	219mm Galvanised & Yellow	50kg

Product details

- 3mm wall thickness - 114mm and 152mm
- 5mm wall thickness - 139mm, and 168mm - 219mm
- 3 hole round plate - 133mm x 5mm - 114mm diameter
- 4 hole square plate - 250mm x 10mm - 139mm - 193mm diameters
- 4 hole square plate - 400mm x 10mm - 219mm diameter

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
&44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

