




Binley Shelter - Galvanised Galvanised Steel Frame Open Sided

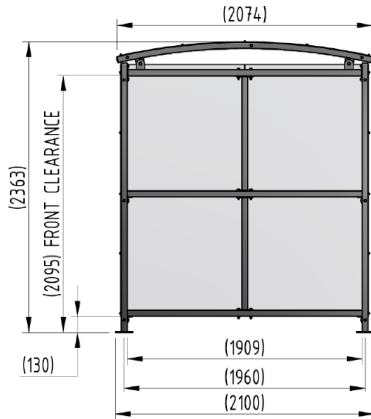

The Binley shelter is a free-standing, open fronted shelter designed for on site assembly, constructed from galvanised mild steel. Complete with galvanised sheet roof, and side panels. Side-to side curved roof.

Suitable as a waiting or trolley shelter. Width of 2m, with lengths from 1m-5m, extension bays can be added to achieve the desired shelter length.

Bolt down as standard.



Part Number	Description	Weight (kg)
138 000 532	Binley Shelter 1m	208kg
138 000 534	Binley Shelter 2m	311kg
138 000 536	Binley Shelter 3m	415kg
138 000 538	Binley Shelter 4m	519kg
138 000 540	Binley Shelter 5m	626kg
138 000 531	Binley Shelter 1m extension bay	
138 000 533	Binley Shelter 2m extension bay	
138 000 535	Binley Shelter 3m extension bay	
138 000 537	Binley Shelter 4m extension bay	
138 000 539	Binley Shelter 5m extension bay	

Product details

- Height – 2095mm clearance, 2363mm overall
- Width – 2074mm overall
- Length – 1m, 2m, 3m, 4m, 5m and extensions
- Square flange plate - 140mm x 140mm x 8mm
- Each flange plate requires 4 bolts
- 1mm galvanised steel panels

Installation & use

This product is guaranteed for 12 months (if installed and used correctly)
Each shelter leg requires bolting down to a suitable concrete surface, using expanding anchor bolts
The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes
On-site assembly requires construction skill



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP





Binley Shelter - Galvanised Galvanised Steel Frame Open Sided



2 x 1
138 000 532



2 x 2
138 000 534



2 x 3
138 000 536



2 x 4
138 000 538



2 x 5
138 000 540



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

