

1200mm Bollard 90mm - 193mm Diameter Black and Yellow






The AUTOPA range of Black & Yellow bollards are ideal for providing High Visibility protection in both internal and external warehousing environments. All products in the range are galvanised mild steel, ensuring their longevity and are designed to take the knocks and bumps that occur in all warehouse environments.

The Bollard is 1200mm tall and 400mm below ground for casting into concrete (1600mm overall), and 1200mm tall bolt down.

The bollard is coated Black with 2 x 150mm reflective yellow bands spaced at 200mm.

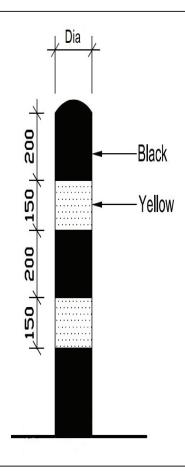

Part Number	<u>Description</u>	<u>Weight</u>
138 121 275BY	90mm Diameter, Concrete In	10.2kg
138 121 274BY	90mm Diameter, Bolt Down	8.2kg
138 121 428	114mm Diameter, Concrete In	13.1kg
138 121 438	114mm Diameter, Bolt Down	10.8kg
138 121 630	139mm Diameter, Concrete In	26.9kg
138 121 640	139mm Diameter, Bolt Down	24.8kg
138 121 650	152mm Diameter, Concrete In	29.5kg
138 121 660	152mm Diameter, Bolt Down	27.4kg
138 121 720	168mm Diameter, Concrete In	32.5kg
138 121 730	168mm Diameter, Bolt Down	29.2kg
138 121 790	193mm Diameter, Concrete In	38.5kg
138 121 780	193mm Diameter, Bolt Down	33.1kg

Product details

- · Galvanised mild steel, coated Black with yellow reflective bands
- Bolt down 1200mm tall

Concrete In - 1200mm above ground - 400mm below ground

Installation & use

It is recommended that posts are placed no further then 1200mm apart to ensure no vehicle can pass between the posts
Black and Yellow bollards require an excavated hole (no less than 400mm deep and 600mm diameter) for installation
Black and Yellow bolt down bollards require bolting down to a suitable concrete surface.

This product is guaranteed for 12 months (if installed and used correctly)



